

Rydal II

Backlit LED panel with emergency option


Plug-in emergency 

Flicker-free 

UGR < 19 

• UGR < 19*

- TP(a)-rated diffuser for enhanced fire safety
- DALI, 0-10V and PUSH dimming alternative driver available
- Optional plug-in emergency modules, available in standard, self-test and DALI
- Flicker-free
- Direct backlit lighting with wide-angle optics
- Optional anti-glare diffusers available
- SDCM < 3

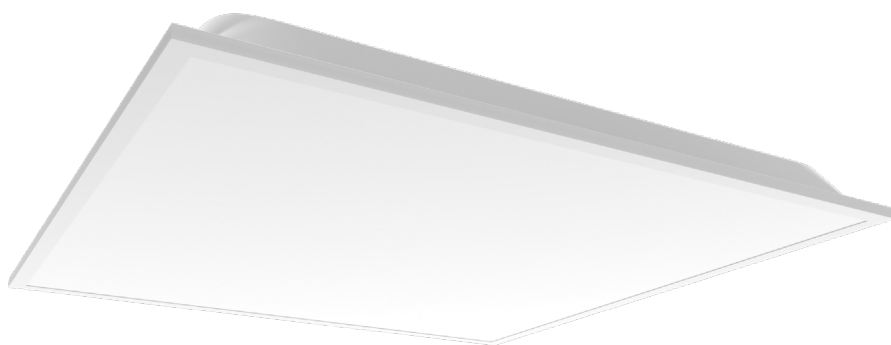

Push-wire terminal block included

3 3 Years
Product Warranty

1 1 Years
On-Site Warranty

1000V
Surge Protection

DALI, 0-10V & PUSH
Dimmable Options

Casambi
Dimmable Options

Recommended



Emergency Module
UEM ⇨ P65



Emergency Module
UEM Pro ⇨ P62



Emergency Kit
Niah ⇨ P110



Anti-glare diffuser
Diffuser Accessories ⇨ P151

General Specification

Voltage	220-240Vac 50/60Hz
CRI	82
SDCM	5
L80B10 Lifetime	105000h
Power Factor	>0.90
Ambient Temp	-20°C to 50°C
Housing	Aluminium



Order Code	Power	Dimension	CCT	Lumen
RYD230	30W	595x595	4000K	3200lm

* UGR < 19 for room size of 4h x 2h, UGR < 21 for room size of 4h x 8h

Optional Gears

Type	Order Code	Description
Casambi Dimmable driver	DRC42/CSB	Bluetooth & PUSH button dimmable driver
Dimmable driver	DRC30/DA	Configurable DALI, 0-10V & PUSH Dimmable Driver
Dimmable driver	DRC40/DA	Configurable DALI, 0-10V & PUSH Dimmable Driver
Emergency module	UEM03	Standard UEM, 3W, Li-ion battery
Emergency module	UEM03/SST	Standard & Self-test 2 in 1 UEM, 3W, Li-ion battery
Emergency module	UEM04	Standard UEM Pro, 4W, Li-ion battery, 2 x 3-core cable terminals
Emergency module	UEM04/SST	Standard & Self-test 2 in 1 UEM Pro, 4W, Li-ion battery, 2 x 3-core cable terminals
DALI-2 emergency module	UEM04/DA	DALI-2 UEM Pro, 4W, Li-ion battery, 2 x 3-core cable terminals
Emergency kit	EMPAD02	Standard emergency kit
Emergency kit	EMPAD02/SST	Standard & Self-test 2 in 1 emergency kit

Accessories

Type	Order Code	Description
Surface-mount frame	SMT0606	595x595mm surface-mount frame, white
SAS/Burgess Clips	SAS0606	Clips for SAS150, SAS120 & Burgess ceilings
Suspension kits	SUS04	Maximum 1.0m drop
Suspension kits	SUS04/25	Maximum 2.5m drop
Recessed-mount frame	REC0606	595x595mm recessed-mount frame, white
Sky light recessed frame	SRF0606	595x595mm sky light recessed frame, white
Diffuser	ALDAG-0606	595x595mm anti-glare diffuser

Order Code

RYD230-W40

Dimensions